CRD645M16 stainless steel
60 cm, Ceramic hob

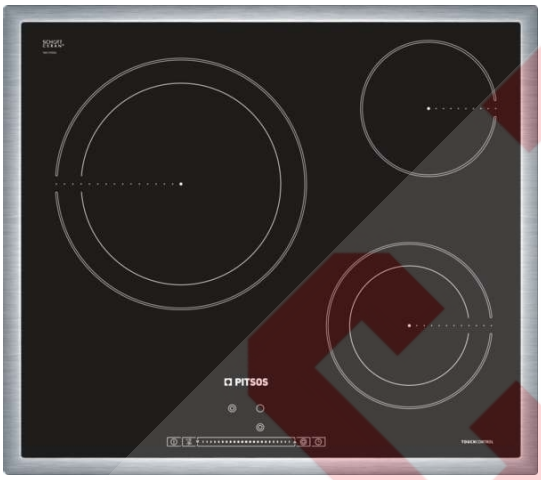

CRD645M16

Design:

- Frame design

Comfort:

- 3 HighSpeed cooking zones, including:
- 2 dual zones
- Zone extension activation with a touch sensor
- Touch Control
- 17 power levels
- Electronic display
- Timer with switch-off function per cooking zone
- Timer
- Wipe protection function

Environment+safety:

- 2 stage residual heat indicator per cooking zone for each zone
- Childproof lock
- Safety switch-off
- Re Start function
- Power on indicator light
- Main switch

Professional equipment:

Quickness:

Measurements:

- Min. worktop thickness: 20 mm

Optional accessories

P390042 Set of 3 pots and 1 pan

Included accessories

5201369634942

1 Mesogis Avenue 8280, Paphos, Cyprus Tel: +357 26222444 Fax: +35726933677
URL: httpp://www.cmcelectric.com Email: info@cmcelectric.com

CRD645M16 stainless steel
60 cm, Ceramic hob

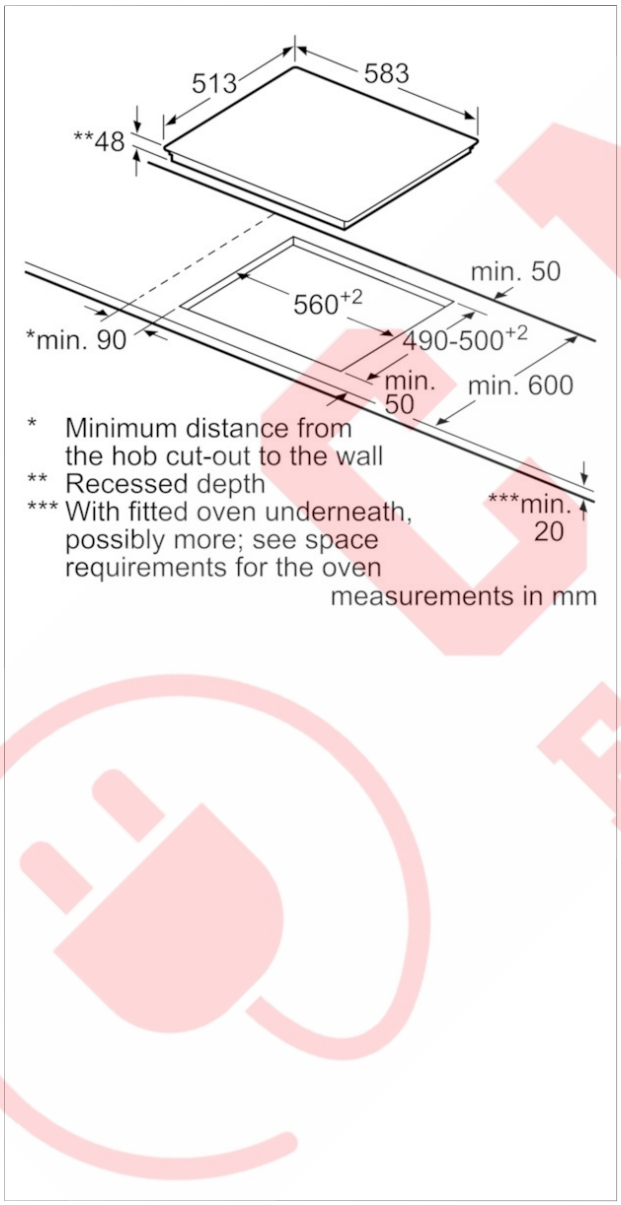

Characteristics
Product name/family: Cooking zone ceramic
Construction type: Built-in
Energy input: Electric
Total number of positions that can be used at the same time: 3
Required niche size for installation (HxWxD): 48 x 560-560 x 490-500
Width of the product (mm): 583
Dimensions of the product (mm): 48 x 583 x 513
Dimensions of the packed product (HxWxD) (mm): 100 x 750 x 590
Net weight (kg): 7.460
Gross weight (kg): 8.0
Residual heat indicator: Separate
Location of control panel: Hob front
Basic surface material: Ceramic
Color of surface: Black, Stainless steel
Color of frame: Stainless steel
Approval certificates: CE, VDE
Sealed Burners: No
Power of 2nd heating element (kW): 2 ; 2.7
Power of 5th heating element (kW): 1.2

Consumption and connection features
Electrical connection rating (W): 5700
Gas connection rating (W):
Current (A):
Voltage (V): 220-240
Frequency (Hz): 50-60
Universal Product Code:
Main colour of product: Black
Energy input: Electric
Gas type:
Alternative gas type:
Approval certificates: CE, VDE
Length of electrical supply cord (in):
Plug type: no plug
Required cutout/niche size for installation (in):
Minimum distance from counter front (in):
Minimum distance from rear wall (in):
Appliance Dimensions (h x w x d) (in): + x x
Dimensions of the packed product (in): 3.93 x 23.22 x 29.52
Net weight (lbs): 16
Gross weight (lbs): 18
Total number of positions that can be used at the same time: 3
Length electrical supply cord (cm):
Required niche size for installation (HxWxD): 48 x 560-560 x 490-500
Dimensions of the product (mm): 48 x 583 x 513
Dimensions of the packed product (HxWxD) (mm): 100 x 750 x 590
Net weight (kg): 7.460