



CMC
ELECTRIC

PITSOS

CRD645M16 stainless steel
60 cm, Ceramic hob



CRD645M16

Design:

- Frame design

Comfort:

- 3 HighSpeed cooking zones, including:
- 2 dual zones
- Zone extension activation with a touch sensor
- Touch Control
- 17 power levels
- Electronic display
- Timer with switch-off function per cooking zone
- Timer
- Wipe protection function

Environment+safety:

- 2 stage residual heat indicator per cooking zone for each zone
- Childproof lock
- Safety switch-off
- Re Start function
- Power on indicator light
- Main switch

Professional equipment:

Quickness:

Measurements:

- Min. worktop thickness: 20 mm

Optional accessories

P390042 Set of 3 pots and 1 pan

Included accessories


5201369634942



CMC
ELECTRIC

PITSOS

CRD645M16 stainless steel
60 cm, Ceramic hob

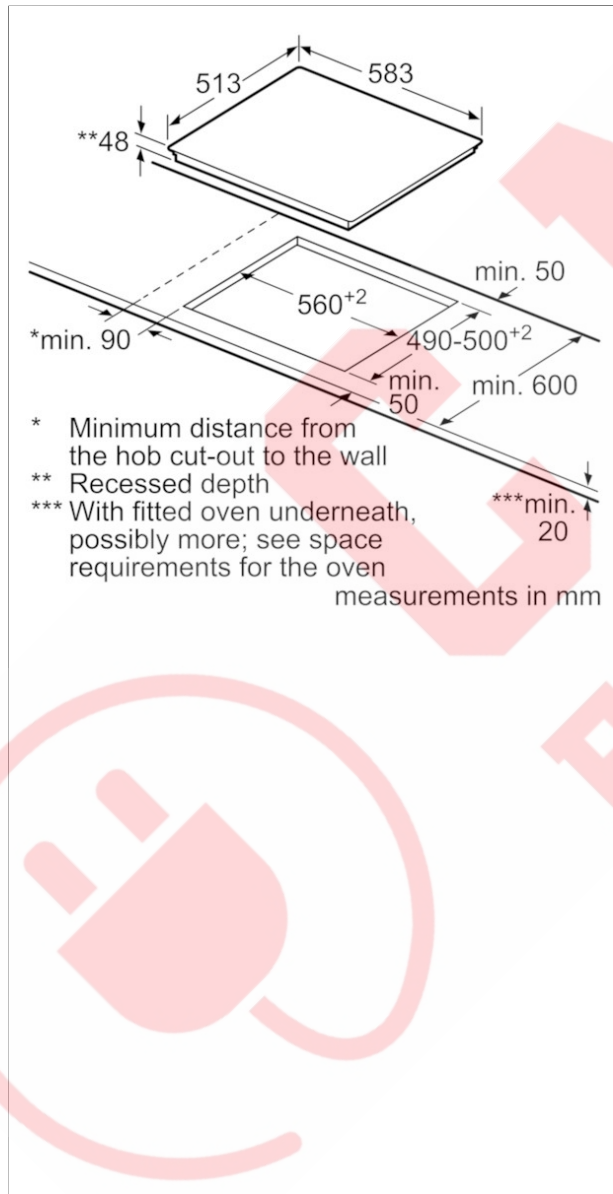

Characteristics

Product name/family: Cooking zone ceramic

Construction type: Built-in

Energy input: Electric

Total number of positions that can be used at the same time: 3

Required niche size for installation (HxWxD): 48 x 560-560 x 490-500

Width of the product (mm): 583

Dimensions of the product (mm): 48 x 583 x 513

Dimensions of the packed product (HxWxD) (mm): 100 x 750 x 590

Net weight (kg): 7.460

Gross weight (kg): 8.0

Residual heat indicator: Separate

Location of control panel: Hob front

Basic surface material: Ceramic

Color of surface: Black, Stainless steel

Color of frame: Stainless steel

Approval certificates: CE, VDE

Sealed Burners: No

Power of 2nd heating element (kW): 2 ; 2.7

Power of 5th heating element (kW): 1.2

Consumption and connection features

Electrical connection rating (W): 5700

Gas connection rating (W):

Current (A):

Voltage (V): 220-240

Frequency (Hz): 50-60

Universal Product Code:

Main colour of product: Black

Energy input: Electric

Gas type:

Alternative gas type:

Approval certificates: CE, VDE

Length of electrical supply cord (in):

Plug type: no plug

Required cutout/niche size for installation (in):

Minimum distance from counter front (in):

Minimum distance from rear wall (in):

Appliance Dimensions (h x w x d) (in): + x x

Dimensions of the packed product (in): 3.93 x 23.22 x 29.52

Net weight (lbs): 16

Gross weight (lbs): 18

Total number of positions that can be used at the same time: 3

Length electrical supply cord (cm):

Required niche size for installation (HxWxD): 48 x 560-560 x 490-500

Dimensions of the product (mm): 48 x 583 x 513

Dimensions of the packed product (HxWxD) (mm): 100 x 750 x 590