



CMC
ELECTRIC

PITSOS



D

2MBB612

- Energy Efficiency Class: D (at a range of energy efficiency classes from A++ to E)
- Average Energy Consumption: 93.6 kWh/year
- Blower Efficiency Class: E*
- Lighting Efficiency Class: E
- Grease Filtering Efficiency Class: C
- Noise min./max. Normal Level: 56/72 dB
- For installation underneath a wall cupboard or on the wall
- Suitable for ducted or re-circulated extraction
- Push button controls for 3 power levels
- Single motor
- Metal grease filter, dishwasher safe
- Adjustable glass visor
- 2 x 4 W LED 4W E14
- Light Intensity: 45 lux
- Colour Temperature: 3000 K
- Extraction rate exhaust air according to EN 61591: max. 350 m³/h
- Noise level according to EN 60704-3 und EN 60704-2-13 at max. normal use exhaust air: 72 dB(A) re 1 pW (58 dB(A) re 20 µPa sound pressure)
- Power rating: 146 W

Optional accessories

DHZ2701 Active carbon filter


Included accessories

5201369635550



CMC
ELECTRIC

PITSOS

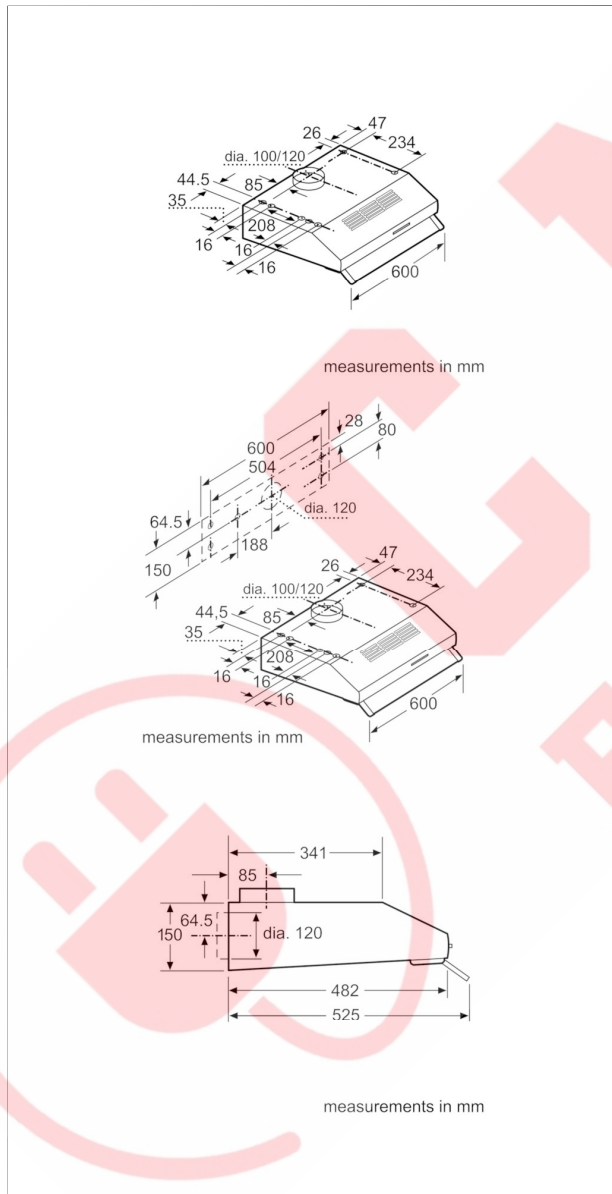

Characteristics

Typology: Traditional

Approval certificates: CE

Length electrical supply cord (cm): 145

Net weight (kg): 7.291

Type of control: mechanical

Number of speed settings: 3

Maximum output air extraction (m³/h): 350

Maximum output recirculating air (m³/h): 110

Number of lights: 2

Noise level (dB): 72

Diameter of air outlet (mm): 120 / 100

Grease filter material: Washable aluminium

Odour filter: No

Operating Mode: Convertible

Optional accessories: DHZ2701

Total power of the lamps (W): 8

Grease filter type: Kasette

Consumption and connection features

Connection Rating (W): 146

Current (A):

Voltage (V): 220-240

Frequency (Hz): 50

Plug type: Gardy plug w/ earthing

Installation typology: Built-under

Universal Product Code:

Material body: Lacquered

Approval certificates: CE

Length of electrical supply cord (in):

Plug type: Gardy plug w/ earthing

Dimensions of the product, with chimney (if exists) (in): / x x

Dimensions of the packed product (in): 10.51 x 29.44 x 25.66

Height of the chimney (in):

Vertical rise height:

Required distance above cooktop/ranges:

Net weight (lbs): 16

Gross weight (lbs): 27

Motor location: Integrated motor in hood body

Maximum output recirculating air (CFM):

Diameter of air duct (in) top:

Diameter of air duct (in) back:

Discharge direction:

No-return airflow flap: No

Length electrical supply cord (cm): 145

Dimensions of the product, with chimney (if exists) (mm): 150 x 600 x 482

Dimensions of the packed product (HxWxD) (mm): 267 x 748 x 652

Height of the chimney (in):

Net weight (kg): 7.291

Gross weight (kg): 12.0