



N 50
D95QFM4N0
D95QFM4N0 STAINLESS STEEL
CHIMNEY HOOD, 90 CM
PYRAMIDAL DESIGN
DQFM954N

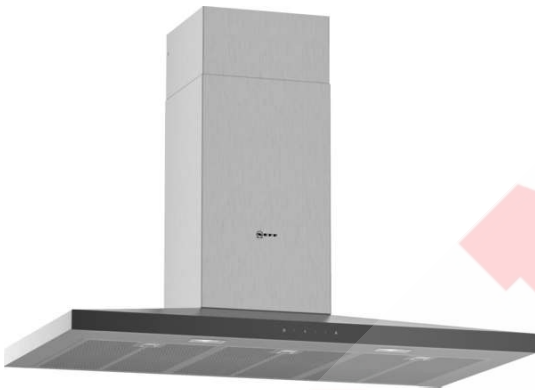

A



Optional accessories

Z50XP0X0	CleanAir act.carbon filter regenerative
Z5170X1	CleanAir active carbon filter spare part
Z51DXA0X0	Active carbon filter
Z51DXU0X0	Recirculating kit
Z51FXI0X0	Integrated CleanAir Recirculation Kit
Z51FXJ0X0	Integrated CleanAir Recirculation Kit
Z5270X0	CleanAir Recirculation Kit
Z5861N0	Back panel stainless steel
Z5895N0	Stainless steel back panel
Z5905N0	Chimney extension 1000 mm
Z5915N0	Chimney extension 1500 mm

Our classic design hood with a modernized twist - experience the 'pyramid' in a slimmer shape

- ✓ LED Lighting – a clear illumination whilst cooking thanks to the energy-saving LED lights
- ✓ Touch Control – thanks to the integrated flat surface control panel, adjustments can be easily made with just one finger
- ✓ Intensive Speed Setting – increases the extraction rate when cooking steam is intense
- ✓ Clean Air – clean air thanks to the premium filter (accessory) with high odour neutralisation (> 90%) in recirculation
- ✓ High Extraction Rate – ensures a clear view while cooking thanks to an efficient motor technology

Features

Technical Data

Color chimney : Stainless steel
 Typology : Chimney
 Approval certificates : CE, VDE
 Length electrical supply cord (cm) : 130
 Height of the chimney (mm) : 582-912/582-1022
 Height of product, without chimney (mm) : 94
 Net weight (kg) : 12.680
 Type of control : Electronic
 Maximum output air extraction (m³/h) : 460
 Boost position output recirculating (m³/h) : 390
 Maximum output recirculating air (m³/h) : 340
 Boost position air extraction (m³/h) : 740
 Number of lights : 2
 Noise level (dB) : 64
 Diameter of air outlet (mm) : 120 / 150
 Grease filter material : Washable stainless steel
 Odour filter : No
 Operating Mode : Convertible
 Optional accessories : Z50XP0X0, Z5170X1, Z51DXA0X0, Z51DXU0X0, Z51FXI0X0, Z51FXJ0X0, Z5270X0, Z5861N0, Z5895N0, Z5905N0, Z5915N0
 Type of lamps used : LED
 Grease filter type : Cassette
 Connection Rating (W) : 255
 Current (A) : 10
 Voltage (V) : 220-240
 Frequency (Hz) : 50; 60
 Plug type : Gardy plug w/ earthing
 Installation typology : Wall-mounted
 Material body : Stainless steel
 Approval certificates : CE, VDE
 Plug type : Gardy plug w/ earthing
 Dimensions of the product, with chimney (if exists) (in) : / x x
 Dimensions of the packed product (in) : 18.89 x 25.59 x 40.15
 Net weight (lbs) : 28
 Gross weight (lbs) : 41
 Motor location : Integrated motor in hood chimney
 No-return airflow flap : Yes
 Length electrical supply cord (cm) : 130
 Dimensions of the product, with chimney (if exists) (mm) : 676-1116 MM x 900 x 500
 Dimensions of the packed product (HxWxD) (mm) : 480 x 650 x 1020
 Net weight (kg) : 12.680
 Gross weight (kg) : 18.0





CMC ELECTRIC

N 50

D95QFM4N0

D95QFM4N0 STAINLESS STEEL

CHIMNEY HOOD, 90 CM

PYRAMIDAL DESIGN

DQFM954N

Features

- Energy Efficiency Class: A (at a range of energy efficiency classes from A++ to E)
- Average Energy Consumption: 53.9 kWh/year
- Blower Efficiency Class: A*
- Lighting Efficiency Class: A
- Grease Filtering Efficiency Class: B
- Noise min./max. Normal Level: 50/64 dB

Variant:

Design:

Operating and power:

Operating mode / operation

Power:

Environment and safety:

Comfort:

Measures:

Technical information:

- Chimney hood
- Appliance colour: stainless steel
- 90 cm Chimney hood
- 90 cm wide
- Suitable for ducted or re-circulated extraction
- For recirculated extraction recirculating kit or CleanAir recirculating kit (accessory) needed
- Wall mounted hood
- TouchControl for extractor speeds and light
- Electronic controls
- Electronic control via touch control
- TouchControl with Electronic display
- 3 speeds plus intensive setting via TouchControl
- Electronic controls via TouchControl with Electronic display
- TouchControl (3 speeds plus intensive setting) with Electronic display
- 3 speeds plus intensive setting
- Automatic revert setting, 6 minutes
- Twin channel high performance fan motor
- Energy efficient capacitor motor
- 2 x 1,5W LED
- Light Intensity: 221 lux
- Colour Temperature: 3500 K
- Stainless steel filter covers, dishwasher safe
- Metal grease filter, dishwasher safe
- Extraction rate according to EN 61591 \varnothing 15 cm:
max. Normal use 460 m³/h
Intensive 740 m³/h
- Extraction rate exhaust air according to EN 61591 max. 460 m³/h
- Maximum extraction rate exhaust air 460 m³/h according to EN 61591
- Extraction rate exhaust air according to EN 61591:
max. normal use 460 m³/h, intensive 740 m³/h
- Noise level according to EN 60704-3 und EN 60704-2-13 at max. normal use exhaust air: 64 dB(A) re 1 pW (52 dB(A) re 20 μ Pa sound pressure)
- Noise level according to EN 60704-3 und EN 60704-2-13 exhaust air:
Max. normal use: 64 dB(A) re 1 pW sound pressure: 52 dB(A)
Intensive: 73 dB(A) re 1 pW (61 dB(A) re 20 μ Pa sound pressure)
- Diameter pipe \varnothing 150 mm (\varnothing 120 mm enclosed)
- Max. extraction rate: 740 m³/h
- Extraction rate in recirculation mode:
Max. normal use: 340 m³/h
Intensive: 390 m³/h
- Noise levels in recirculation mode:
Max. normal use: 74 dB(A) re 1 pW (62 dB(A) re 20 μ Pa sound pressure)
Intensive: 77 dB(A) re 1 pW (65 dB(A) re 20 μ Pa sound pressure)
- Dimensions exhaust air (HxWxD): 676-1006 x 900 x 500 mm
- Dimensions recirculating (HxWxD): 676-1116 x 900 x 500 mm



N 50

D95QFM4N0

D95QFM4N0 STAINLESS STEEL

CHIMNEY HOOD, 90 CM

PYRAMIDAL DESIGN

DQFM954N

Features

** In accordance with the EU-Regulation No 65/2014*



N 50

D95QFM4N0

D95QFM4N0 STAINLESS STEEL

CHIMNEY HOOD, 90 CM

PYRAMIDAL DESIGN

DQFM954N

Dimensioned drawings

