



**CMC**  
**ELECTRIC**

**PITSOS**



A

#### **PTK6E65G**

- Energy Efficiency Class: A (at a range of energy efficiency classes from A++ to E)
- Average Energy Consumption: 44 kWh/year
- Blower Efficiency Class: A\*
- Lighting Efficiency Class: A
- Grease Filtering Efficiency Class: C
- Noise min./max. Normal Level: 48/60 dB

#### **Variant:**

#### **Design:**

#### **Operating and power:**

#### **Operating mode / operation**

#### **Power:**

#### **Environment and safety:**

#### **Comfort:**

#### **Measures:**


#### **Technical information:**

- Wall-mounted chimney hood
- Appliance colour: Brushed steel
- 60 cm Wall-mounted chimney hood
- 60 cm wide
- Suitable for ducted or re-circulated extraction
- For recirculated extraction recirculating kit or CleanAir recirculating kit (accessory) needed
- Wall mounted hood
- Push button controls for extractor speeds and light
- Electronic controls
- Electronic control via soft touch buttons
- Push button controls, backlit
- 3 speed + intensive operation via Push button controls
- 3 speed + intensive operation
- Automatic revert setting, 6 minutes
- Twin channel high performance fan motor
- Energy efficient capacitor motor
- 2 x 1,5W LED
- Light Intensity: 250 lux
- Colour Temperature: 3500 K
- Metal grease filter, dishwasher safe
- Extraction rate according to EN 61591  $\varnothing$  15 cm:
  - max. Normal use 360 m<sup>3</sup>/h
  - Intensive 580 m<sup>3</sup>/h
- Extraction rate exhaust air according to EN 61591 max. 360 m<sup>3</sup>/h
- Maximum extraction rate exhaust air 360 m<sup>3</sup>/h according to EN 61591
- Extraction rate exhaust air according to EN 61591:
  - max. normal use 360 m<sup>3</sup>/h, intensive 580 m<sup>3</sup>/h
- Noise level according to EN 60704-3 und EN 60704-2-13 at max. normal use exhaust air: 60 dB(A) re 1 pW (48 dB(A) re



**CMC**  
**ELECTRIC**

**PITSOS**

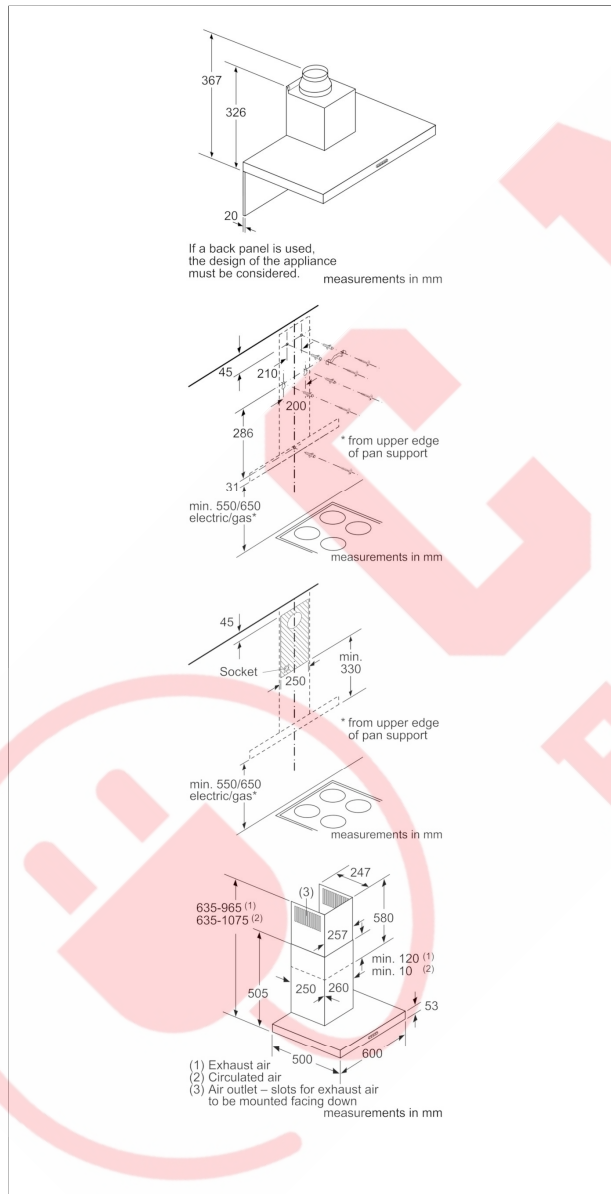

#### Characteristics

**Color chimney: Stainless steel**

**Typology: Chimney**

**Approval certificates: CE, VDE**

**Length electrical supply cord (cm): 130**

**Height of the chimney (mm): 583-912/583-1022**

**Height of product, without chimney (mm): 53**

**Net weight (kg): 10.885**

**Type of control: Electronic**

**Maximum output air extraction (m<sup>3</sup>/h): 360**

**Boost position output recirculating (m<sup>3</sup>/h): 340**

**Maximum output recirculating air (m<sup>3</sup>/h): 270**

**Boost position air extraction (m<sup>3</sup>/h): 580**

**Number of lights: 2**

**Noise level (dB): 60**

**Diameter of air outlet (mm): 120 / 150**

**Grease filter material: Washable aluminium**

**Odour filter: No**

**Operating Mode: Convertible**

**Optional accessories: DHZ1225, DHZ1235, DSZ5201, DSZ6200, DWZ0DX0A0, DWZ0DX0U0, DWZ0XX0I0, DZZ0XX0P0**

**Type of lamps used: LED**

**Grease filter type: Kasette**

#### Consumption and connection features

**Connection Rating (W): 220**

**Current (A): 10**

**Voltage (V): 220-240**

**Frequency (Hz): 50; 60**

**Plug type: Gardy plug w/ earthing**

**Installation typology: Wall-mounted**

**Universal Product Code:**

**Material body: Stainless steel**

**Approval certificates: CE, VDE**

**Length of electrical supply cord (in):**

**Plug type: Gardy plug w/ earthing**

**Dimensions of the product, with chimney (if exists) (in): / x x**

**Dimensions of the packed product (in): 19,29 x 25,59 x 28,34**

**Height of the chimney (in):**

**Vertical rise height:**

**Required distance above cooktop/ranges:**

**Net weight (lbs): 24**

**Gross weight (lbs): 35**

**Motor location: Integrated motor in hood chimney**

**Maximum output recirculating air (CFM):**

**Diameter of air duct (in) top:**

**Diameter of air duct (in) back:**

**Discharge direction:**

**No-return airflow flap: No**