




iQ700 EX675LYV1E SE Top Frame 60 cm Induction Ceramic hob

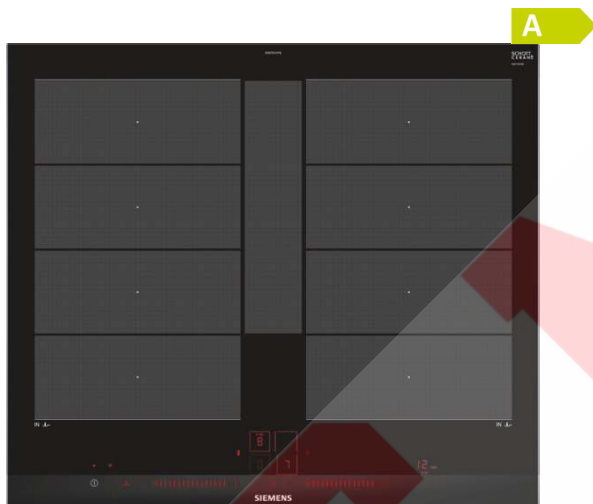

Optional accessories

HZ399092	Cookbook frying sensor(5 levels)HC-Dummy
HZ390522	Griddle Plate
HZ390512	Teppan Yaki (large)
HZ390511	Teppan Yaki (small)
HZ390250	System pan diameter 28 cm
HZ390230	System pan diameter 21cm
HZ390220	System pan diameter 19 cm
HZ390210	System pan diameter 15 cm
HZ390042	set of 3 pots and 1 pan
HZ390012	Steaming Rack for Stainless Steel roaste
HZ390011	Stainless Steel roaster with glas lid

The modern flexInduction cooktop - for greater flexibility when cooking.

- ✓ flexInduction Plus adapts the cooking zones to different cookware and pots up to 30 cm diameter – for more flexibility.
- ✓ powerMove Plus enables intuitive control thanks to three heating zones with different temperatures – activated by touch.
- ✓ dual lightSlider lets you easily and intuitively operate the hob.
- ✓ Home Connect: Information about your cooktop, no matter where you are - with the easy-to-use Home Connect App. (Only in countries where Home Connect service is available)
- ✓ cookConnect system: The convenient cookConnect system allows you to control different functions of the hood directly from your cooktop. (with matching hood)
- ✓ The fryingSensor Plus controls the temperature in the pan so can never burn again.

Features

Technical Data

Product name/family : Cooking zone ceramic
 Construction type : Built-in
 Energy input : Electric
 Total number of positions that can be used at the same time : 4
 Required niche size for installation (HxWxD) : 51 x 560-560 x 490-500
 Width of the product (mm) : 602
 Dimensions of the product (mm) : 51 x 602 x 520
 Dimensions of the packed product (HxWxD) (mm) : 126 x 753 x 603
 Net weight (kg) : 16.338
 Gross weight (kg) : 18.0
 Residual heat indicator : Separate
 Location of control panel : Hob front
 Basic surface material : Ceramic
 Color of surface : Alu, brushed, Black
 Color of frame : Alu, brushed
 Approval certificates : AENOR, CE
 Length electrical supply cord (cm) : 110
 Sealed Burners : No
 heating with booster : All
 Power of 2nd heating element (kW) : 3.3
 Power of heating element (kW in boost) : [3.7]
 Power of 2nd heating element (kW in boost) : 3.7
 Power of 6th heating element (kW in boost) : 3.7
 Electrical connection rating (W) : 7400
 Voltage (V) : 220-240
 Frequency (Hz) : 50; 60
 Main colour of product : Black
 Energy input : Electric
 Approval certificates : AENOR, CE
 Plug type : no plug
 Appliance Dimensions (h x w x d) (in) : + x x
 Dimensions of the packed product (in) : 4.96 x 23.74 x 29.64
 Net weight (lbs) : 36
 Gross weight (lbs) : 39
 Total number of positions that can be used at the same time : 4
 Length electrical supply cord (cm) : 110
 Required niche size for installation (HxWxD) : 51 x 560-560 x 490-500
 Dimensions of the product (mm) : 51 x 602 x 520
 Dimensions of the packed product (HxWxD) (mm) : 126 x 753 x 603
 Net weight (kg) : 16.338
 Gross weight (kg) : 18.0





iQ700
EX675LYV1E
SE Top Frame
60 cm Induction Ceramic hob

Features

Professional equipment:

- Dual lightSlider touch control
- fryingSensor Plus with 5 temperature settings

Design:

- SE Top Frame

Comfort:

- 4 Induction cooking zones
- 2 FlexZones extended
- flexInduction Plus
- flexMotion
- powerMove Plus
- reStart Function
- quickStart Function
- Switch off timer for every cooking zone
- Timer
- Count-up timer
- Keep warm function for all cooking zones
- 17 power levels
- Home Connect (only in countries where Home Connect service is available)
- cookConnect system (with matching hood)

Environment+safety:

- Automatic pan recognition sensor
- powerManagement function
- Safety switch-off
- Childproof lock
- Wipe protection function
- quickStop
- Digital 2-step Residual heat indicator
- Main switch
- Energy consumption display

Quickness:

- PowerBoost function for all zones
- panBoost

Power and size:

- Cooking zones: 1 x Ø 380 mmx230 mm, 3.3 KW (max. Power levels 3.7 KW) Induction or 2 x Ø 190 mm, 2.2 KW (max. Power levels 3.7 KW) Induction; 1 x Ø 380 mmx230 mm, 3.3 KW (max. Power levels 3.7 KW) Induction or 2 x Ø 190 mm, 2.2 KW (max. Power levels 3.7 KW) Induction

Measurements:

- Installation dimensions: (ID/W/D) 51 mm x 560 mm x 490 mm
- Appliance dimensions: (W/D) 602 mm x 520 mm
- Connection cable (1.1 M)
- Min. worktop thickness: 30 mm
- Connected load: 7.4 kW
- Cable included



iQ700
EX675LYV1E
SE Top Frame
60 cm Induction Ceramic hob

Dimensioned drawings

