




CMC

ELECTRIC



N 30
D5855X1
CANOPY HOOD
CANOPY HOODDBM80A

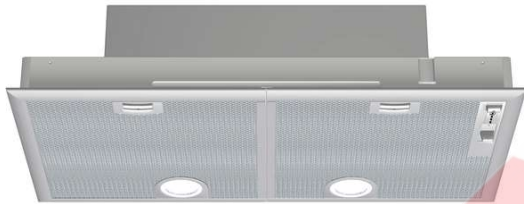

Optional accessories	
Z5155X0	Accessories extractor hoods
Z5552X0	Accessories extractor hoods

Canopy hood: Your canopy hood fits discreetly into your cabinet or brick chimney for more spacious versatility in the home

- ✓ LED Lighting – a clear illumination whilst cooking thanks to the energy-saving LED lights
- ✓ Intensive Speed Setting – increases the extraction rate when cooking steam is intense
- ✓ High Extraction Rate – ensures a clear view while cooking thanks to an efficient motor technology

Features

Technical Data
 Typology : Traditional
 Approval certificates : CE, Eurasian, VDE
 Length electrical supply cord (cm) : 130
 Required niche size for installation (HxWxD) : 255mm x 700mm x 350mm
 Net weight (kg) : 7.815
 Type of control : mechanical
 Maximum output air extraction (m3/h) : 379
 Boost position output recirculating (m3/h) : 408
 Maximum output recirculating air (m3/h) : 278
 Boost position air extraction (m³/h) : 638
 Number of lights : 2
 Noise level (dB) : 56
 Diameter of air outlet (mm) : 120 / 150
 Grease filter material : Washable aluminium
 Odour filter : No
 Operating Mode : Convertible
 Optional accessories : Z5155X0, Z5552X0
 Grease filter type : Kasette
 Connection Rating (W) : 206
 Current (A) : 10
 Voltage (V) : 220-240
 Frequency (Hz) : 50
 Plug type : Gardy plug w/ earthing
 Installation typology : Built-in
 Material body : Lacquered
 Approval certificates : CE, Eurasian, VDE
 Plug type : Gardy plug w/ earthing
 Dimensions of the product, with chimney (if exists) (in) : / x x
 Dimensions of the packed product (in) : 11.41 x 30.70 x 17.32
 Net weight (lbs) : 17
 Gross weight (lbs) : 20
 Motor location : Integrated motor in hood body
 No-return airflow flap : Yes
 Length electrical supply cord (cm) : 130
 Dimensions of the product, with chimney (if exists) (mm) : 255 x 730 x 380
 Dimensions of the packed product (HxWxD) (mm) : 290 x 780 x 440
 Net weight (kg) : 7.815
 Gross weight (kg) : 9.0





CMC
ELECTRIC

N 30

D5855X1

CANOPY HOOD

CANOPY HOODDBM80A

Features

- * Energy Efficiency Class: C (at a range of energy efficiency classes from A++ to E)
- * Average Energy Consumption: 81.2 kWh/year
- * Blower Efficiency Class: D*
- * Lighting Efficiency Class: A
- * Grease Filtering Efficiency Class: B
- * Noise min./max. Normal Level: 38/56 dB
- * Suitable for ducted or re-circulated extraction
- * For recirculated extraction charcoal filter (accessory) needed
- * For installation in a modified cupboard, above a hob
- * Appliance colour: silver metallic
- * High extraction with 2 motors
- * 3 speeds plus intensive setting
- * 3 speeds plus intensive setting
- * Large filter area featuring a metal grease filter
- * 2 x LED spot 2,15W (low volt)
- * Metal grease filter, dishwasher safe
- * Light Intensity: 438 lux
- * Colour Temperature: 3500 K
- * Extraction rate according to EN 61591 ø 15 cm:
max. Normal use 379 m³/h
Intensive 638 m³/h
- * Noise level according to EN 60704-3 und EN 60704-2-13 exhaust air:
Max. normal use: 56 dB(A) re 1 pW sound pressure:43 dB(A)
Intensive: 68 dB(A) re 1 pW (55 dB(A) re 20 µPa sound pressure)
- * Max. extraction rate: 638 m³/h
- * Dimensions (HxWxD): 255 x 730 x 380 mm
- * Mounting dimensions: width: 70 cm, depth: 35 cm
- * 120 or 150 mm diameter pipe
- * Electrical cable length 1.3 m
- * Power rating: 206 W
- * with one-way flap
- * *In accordance with the EU-Regulation No 65/2014*



CMC ELECTRIC

N 30

D5855X1

CANOPY HOOD

CANOPY HOODDBM80A

Dimensioned drawings

