



N 70

D95BMP5N0

D95BMP5N0 STAINLESS STEEL


CHIMNEY HOOD

BOX DESIGN

DBMP955N



A

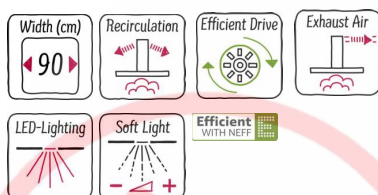

Optional accessories

Z50XP0X0	CleanAir act.carbon filter regenerative
Z5102X1	Active carbon filter
Z5102X5	Recirculating kit
Z5170X1	CleanAir active carbon filter spare part
Z51FXI0X5	Integrated CleanAir Recirculation Kit
Z51FXJ0X5	Integrated CleanAir Recirculation Kit
Z5276X0	CleanAir Recirculation Kit
Z5861N0	Back panel stainless steel
Z5895N0	Stainless steel back panel
Z5906N1	Chimney extension 1000 mm
Z5916N1	Chimney extension 1500 mm

Flat design in a modern shape - our classic design hood 'box'.

- ✓ High Extraction Rate – ensures a clear view while cooking thanks to an efficient motor technology
- ✓ Special Noise Insulation – guarantees an extremely quiet cooking experience
- ✓ Dimmer Function – easily dim the light according to your mood with the touch of a finger
- ✓ LED Lighting – a clear illumination whilst cooking thanks to the energy-saving LED lights
- ✓ Efficient Drive – new motor technology makes cooking very quiet and energy-efficient

Features

Technical Data

Color chimney : Stainless steel
 Typology : Chimney
 Approval certificates : CE, VDE
 Length electrical supply cord (cm) : 130
 Height of product, without chimney (mm) : 46
 Net weight (kg) : 19.363
 Type of control : Electronic
 Number of speed settings : 3-stage + 2 intensive
 Maximum output air extraction (m³/h) : 427
 Boost position output recirculating (m³/h) : 378
 Maximum output recirculating air (m³/h) : 324
 Boost position air extraction (m³/h) : 702
 Number of lights : 3
 Noise level (dB) : 55
 Diameter of air outlet (mm) : 120 / 150
 Grease filter material : Washable stainless steel
 Odour filter : No
 Operating Mode : Convertible
 Delay Shut off modes : 10M
 Optional accessories : Z50XP0X0, Z5102X1, Z5102X5, Z5170X1, Z51FXI0X5, Z51FXJ0X5, Z5276X0, Z5861N0, Z5895N0, Z5906N1, Z5916N1
 Type of lamps used : LED
 Grease filter type : Cassette
 Connection Rating (W) : 145
 Current (A) : 10
 Voltage (V) : 220-240
 Frequency (Hz) : 50; 60
 Plug type : Gardy plug w/ earthing
 Installation typology : Wall-mounted
 Material body : Stainless steel
 Approval certificates : CE, VDE
 Plug type : Gardy plug w/ earthing
 Dimensions of the product, with chimney (if exists) (in) : / x x
 Dimensions of the packed product (in) : 22.83 x 25.59 x 38.18
 Net weight (lbs) : 43
 Gross weight (lbs) : 55
 Motor location : Integrated motor in hood chimney
 No-return airflow flap : Yes
 Length electrical supply cord (cm) : 130
 Dimensions of the product, with chimney (if exists) (mm) : 628-954 x 898 x 500
 Dimensions of the packed product (HxWxD) (mm) : 580 x 650 x 970
 Net weight (kg) : 19.363
 Gross weight (kg) : 25.0





CMC ELECTRIC

N 70

D95BMP5N0

D95BMP5N0 STAINLESS STEEL

CHIMNEY HOOD

BOX DESIGN

DBMP955N

Features

- Energy Efficiency Class: A (at a range of energy efficiency classes from A++ to E)
- Average Energy Consumption: 33.6 kWh/year
- Blower Efficiency Class: A*
- Lighting Efficiency Class: A
- Grease Filtering Efficiency Class: B
- Noise min./max. Normal Level: 45/55 dB

Variant:

Design:

Operating and power:

Operating mode / operation

Power:

Environment and safety:

Comfort:

Measures:

Technical information:

- Chimney hood
- 90 cm wide
- Appliance colour: stainless steel
- Suitable for ducted or re-circulated extraction
- For recirculated extraction recirculating kit or CleanAir recirculating kit (accessory) needed
- Wall mounted hood
- EASY Installation
- TouchControl for extractor speeds and light
- Electronic controls
- TouchControl with 2x7-segment display
- 3 speeds plus 2 intensive via TouchControl
- Electronic controls via TouchControl with 2x7-segment display
- TouchControl (3 speeds plus 2 intensive) with 2x7-segment display
- 3 speeds plus 2 intensive
- Automatic revert setting, 6 minutes
- Automatic 10 minutes after running
- easy to clean Innerframe
- Light dimmer function
- Softlight
- Interval operation
- Noise reduction function
- Efficient BLDC-technology
- 3 x 1,5W LED
- Light Intensity: 373 lux
- Colour Temperature: 3500 K
- Saturation indicator for metal and charcoal filter
- Stainless steel filter covers, dishwasher safe
- Metal grease filter, dishwasher safe
- Extraction rate according to EN 61591 \varnothing 15 cm:
max. Normal use 427 m³/h
Intensive 702 m³/h
- Extraction rate exhaust air according to EN 61591 max. 427 m³/h
- Maximum extraction rate exhaust air 427 m³/h according to EN 61591
- Extraction rate exhaust air according to EN 61591:
max. normal use 427 m³/h, intensive 702 m³/h
- Dimensions recirculating with CleanAir module (HxWxD):
689 x 898 x 500 mm - mounting with outer chimney
809-1139 x 898 x 500 mm - mounting with telescopic chimney
- Additional noise insulation
- Noise level according to EN 60704-3 und EN 60704-2-13 at max. normal use exhaust air: 55 dB(A) re 1 pW (42 dB(A) re 20 μ Pa sound pressure)
- Noise level according to EN 60704-3 und EN 60704-2-13 exhaust air:
Max. normal use: 55 dB(A) re 1 pW sound pressure: 42 dB(A)
Intensi e: 66 dB(A) re 1 pW (53 dB(A) re 20 μ Pa sound pressure)
- Diameter pipe \varnothing 150 mm (\varnothing 120 mm enclosed)



N 70

D95BMP5N0

D95BMP5N0 STAINLESS STEEL


CHIMNEY HOOD

BOX DESIGN

DBMP955N

Features

** In accordance with the EU-Regulation No 65/2014*

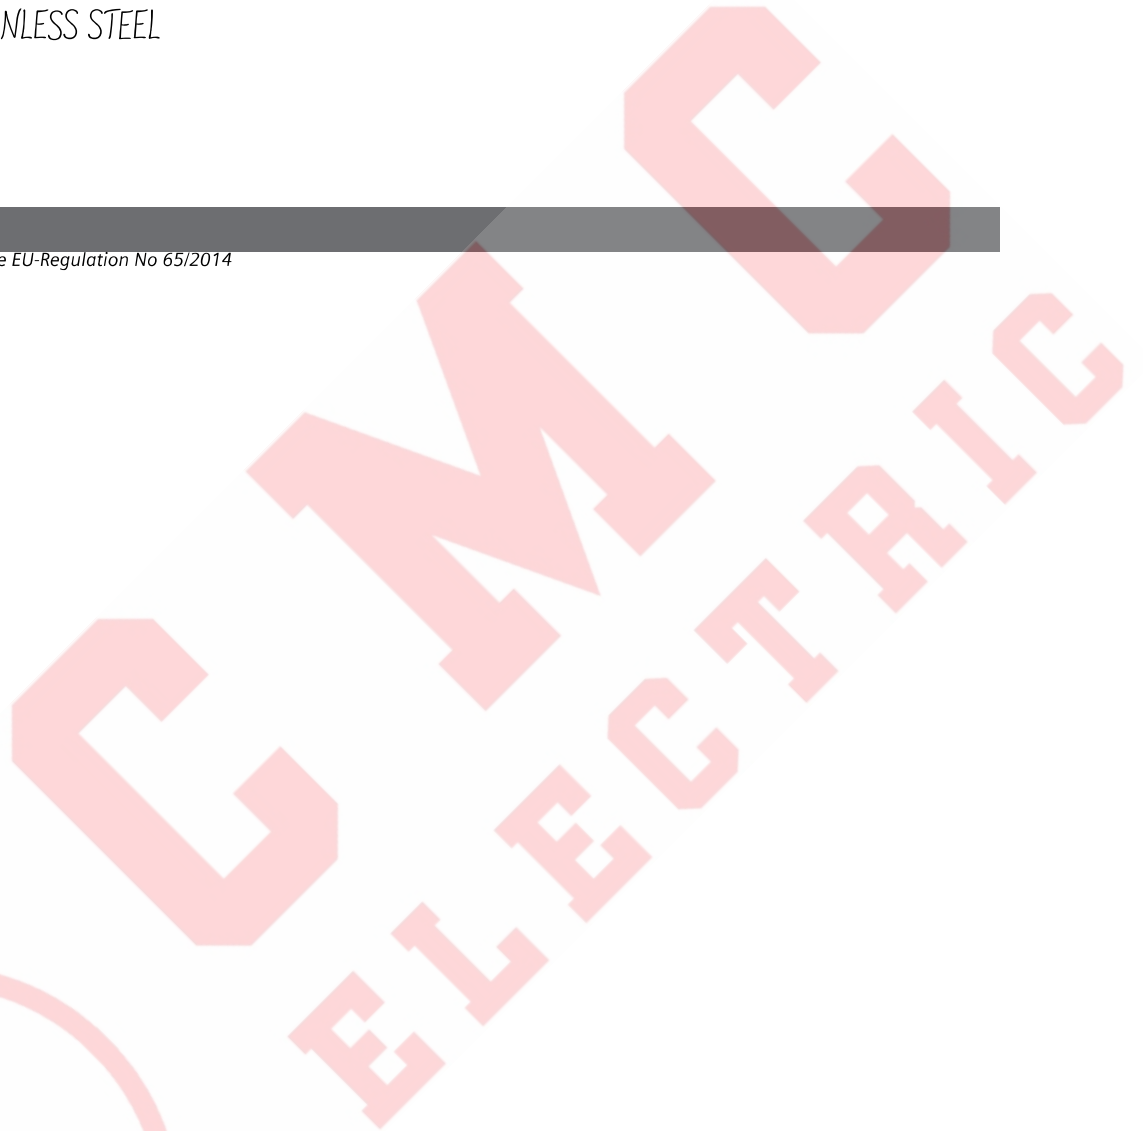



CMC ELECTRIC

N 70

D95BMP5N0

D95BMP5N0 STAINLESS STEEL

CHIMNEY HOOD

BOX DESIGN

DBMP955N

Dimensioned drawings

