

**Serie | 6, wall-mounted cooker hood,  
60 cm, Stainless steel  
DWB67JP50**



**Optional accessories**

DHZ1225 Chimney extension 1000 mm, DHZ1235 Chimney extension 1500 mm, DHZ5325 Recirculating kit, DHZ5326 Active carbon filter, DSZ5201 CleanAir active carbon filter spare part, DSZ6200 CleanAir Recirculation Kit, DWZ0XX0I5 Integrated CleanAir Recirculation Kit, DWZ0XX0J5 Integrated CleanAir Recirculation Kit, DWZ1CX1I6 Integrated Clean Air Plus Recirc. Kit, DWZ1FX5C6 Clean Air Plus Recirculation Kit, DZZ0XX0P0 CleanAir act. carbon filter regenerative, DZZ1XX1B6 Clean Air Plus Active Carbon Filter, HEZG9AS00S Adapter

**A**

**The wall-mounted chimney hood: mount it on the wall, giving you complete freedom in your kitchen planning.**

- **EcoSilence Drive:** our highly efficient motor saves on energy, not on performance.
- **DirectSelect control:** direct selection of desired settings and light.
- **Silent:** maximal extractor performance with little noise
- **Grease filtration level:** filters out up to 88.7% of the grease from kitchen air.

**Technical Data**

Color chimney :	Stainless steel
Typology :	Chimney
Approval certificates :	CE, Eurasian, VDE
Length electrical supply cord (cm) :	130
Height of product, without chimney (mm) :	46
Net weight (kg) :	15.774
Type of control :	Electronic
Number of speed settings :	3-stage + 2 intensive
Maximum output air extraction (m <sup>3</sup> /h) :	414
Boost position output recirculating (m <sup>3</sup> /h) :	322
Maximum output recirculating air (m <sup>3</sup> /h) :	281
Boost position air extraction (m <sup>3</sup> /h) :	657
Number of lights :	2
Noise level (dB) :	61
Diameter of air outlet (mm) :	120 / 150
Grease filter material :	Washable stainless steel
Odour filter :	No
Operating Mode :	Convertible
Delay Shut off modes :	10M
Optional accessories :	DHZ1225, DHZ1235, DHZ5325, DHZ5326, DSZ5201, DSZ6200, DWZ0XX0I5, DWZ0XX0J5, DWZ1CX1I6, DWZ1FX5C6, DZZ0XX0P0, DZZ1XX1B6, HEZG9AS00S
Type of lamps used :	LED
Grease filter type :	Kassette
Connection Rating (W) :	143
Current (A) :	10
Voltage (V) :	220-240
Frequency (Hz) :	50; 60
Plug type :	Gardy plug w/ earthing
Installation typology :	Wall-mounted
Material body :	Stainless steel
Approval certificates :	CE, Eurasian, VDE
Plug type :	Gardy plug w/ earthing
Dimensions of the product, with chimney (if exists) (in) :	/ x x
Dimensions of the packed product (in) :	23.22 x 25.59 x 26.37
Net weight (lbs) :	35
Gross weight (lbs) :	46
Motor location :	Integrated motor in hood chimney
No-return airflow flap :	Yes
Length electrical supply cord (cm) :	130
Dimensions of the product, with chimney (if exists) (mm) :	628-954 x 598 x 500
Dimensions of the packed product (HxWxD) (mm) :	590 x 650 x 670
Net weight (kg) :	15.774
Gross weight (kg) :	21.0



4 242005 099290



## Serie | 6, wall-mounted cooker hood, 60 cm, Stainless steel DWB67JP50

**The wall-mounted chimney hood: mount it  
on the wall, giving you complete freedom in  
your kitchen planning.**

- Energy Efficiency Class: A (at a range of energy efficiency classes from A+++ to D)
- Average Energy Consumption: 34.7 kWh/year
- Blower Efficiency Class: A\*
- Lighting Efficiency Class: A
- Grease Filtering Efficiency Class: B
- Noise min./max. Normal Level: 46/61 dB

### Variant:

### Design:

### Technical information

### Performance

### Power:

### Environment and safety:

### Comfort:

### Measures:

### Technical information


- Wall Hood Brushed steel Hood
- 60 cm wide
- 60 cm Chimney hood, Brushed steel
- Suitable for ducted or re-circulated extraction
- For recirculated extraction recirculating kit or CleanAir recirculating kit (accessory) needed
- Wall mounted hood
- Wall fixing system
- TouchControl
- Electronic controls
- TouchControl with lightline
- 3 speeds plus 2 intensive via TouchControl
- Electronic controls via TouchControl with lightline
- TouchControl (3 speeds plus 2 intensive) with lightline
- 3 speeds plus 2 intensive
- Automatic revert setting, 6 minutes
- Automatic 10 minutes after running
- easy to clean Innerframe
- Light dimmer function
- SoftLight
- Efficient BLDC-technology
- 2 x 1,5W LED
- Light Intensity: 267 lux
- Colour Temperature: 3500 K
- Saturation indicator for metal and charcoal filter
- Stainless steel filter covers, dishwasher safe
- Metal grease filter, dishwasher safe
- Extraction rate according to EN 61591  $\varnothing$  15 cm:  
max. Normal use 413 m<sup>3</sup>/h  
Intensive 657 m<sup>3</sup>/h
- Extraction rate exhaust air according to EN 61591 max. 413 m<sup>3</sup>/h
- Maximum extraction rate exhaust air 413 m<sup>3</sup>/h according to EN 61591
- Extraction rate exhaust air according to EN 61591:  
max. normal use 413 m<sup>3</sup>/h, intensive 657 m<sup>3</sup>/h
- Dimensions recirculating with CleanAir module (HxWxD):  
689 x 598 x 500 mm - mounting with outer chimney  
809-1139 x 598 x 500 mm - mounting with telescopic chimney
- Noise level according to EN 60704-3 und EN 60704-2-13 at max. normal use exhaust air: 61 dB(A) re 1 pW (48 dB(A) re 20  $\mu$ Pa sound pressure)
- Noise level according to EN 60704-3 und EN 60704-2-13 exhaust air:  
Max. normal use: 61 dB(A) re 1 pW sound pressure: 48 dB(A)  
Intensive: 71 dB(A) re 1 pW (58 dB(A) re 20  $\mu$ Pa sound pressure)
- Diameter pipe  $\varnothing$  150 mm ( $\varnothing$  120 mm enclosed)
- with one-way flap
- Max. extraction rate: 657 m<sup>3</sup>/h
- Extraction rate in recirculation mode:  
Max. normal use: 281 m<sup>3</sup>/h  
Intensive: 322 m<sup>3</sup>/h
- Noise levels in recirculation mode:  
Max. normal use: 72 dB(A) re 1 pW (59 dB(A) re 20  $\mu$ Pa sound pressure)



**CMC**  
**ELECTRIC**



*\* In accordance with the EU-Regulation No 65/2014*

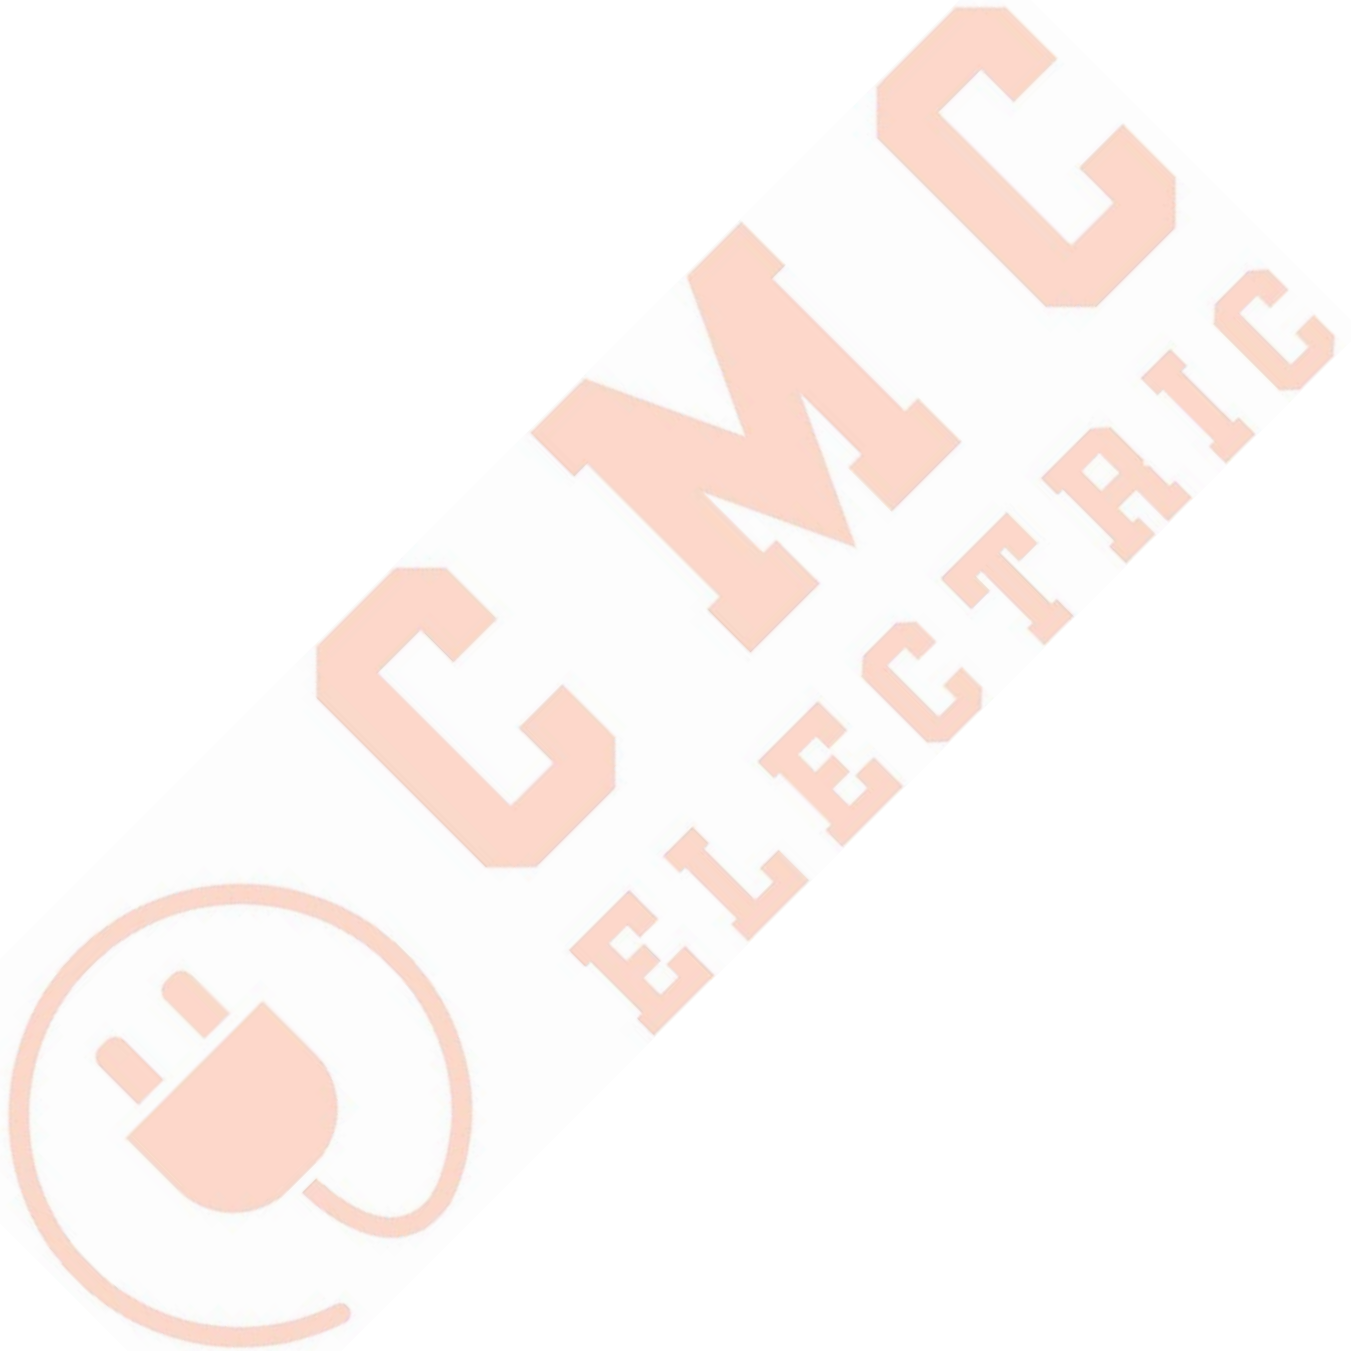



**Serie | 6, wall-mounted cooker hood, 60 cm,  
Stainless steel  
DWB67JP50**

