


N 70
 196BMP5N0
 196BMP5N0 STAINLESS STEEL
 ISLAND CHIMNEY HOOD
 BOX DESIGN
 1BMP965N



A+

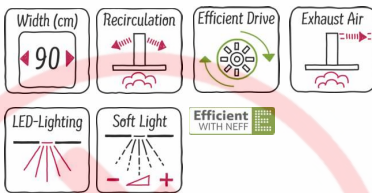

Optional accessories

Z50XP0X0	CleanAir act. carbon filter regenerative
Z5102X1	Active carbon filter
Z5106X5	Recirculating kit
Z5170X1	CleanAir active carbon filter spare part
Z5286X0	CleanAir Recirculation Kit
Z5909N1	Chimney extension 1100 mm
Z5912X0	Adapter for roof inclination left/right
Z5914X0	Adapter for roof inclination front/back
Z5919N1	Chimney extension 1600 mm
Z5921N0	Extension for mounting kit 500 mm
Z5923N0	Extension for mounting kit 1000 mm

Flat design in a modern shape - our classic design hood 'box'.

- ✓ High Extraction Rate – ensures a clear view while cooking thanks to an efficient motor technology
- ✓ Special Noise Insulation – guarantees an extremely quiet cooking experience
- ✓ Dimmer Function – easily dim the light according to your mood with the touch of a finger
- ✓ LED Lighting – a clear illumination whilst cooking thanks to the energy-saving LED lights
- ✓ Efficient Drive – new motor technology makes cooking very quiet and energy-efficient

Features

Technical Data

Color chimney : Stainless steel
 Typology : Chimney
 Approval certificates : CE, VDE
 Length electrical supply cord (cm) : 130
 Height of the chimney (mm) : 698-878/698-998
 Height of product, without chimney (mm) : 46
 Net weight (kg) : 31.807
 Type of control : Electronic
 Number of speed settings : 3-stage + 2 intensive
 Maximum output air extraction (m³/h) : 445
 Boost position output recirculating (m³/h) : 391
 Maximum output recirculating air (m³/h) : 313
 Boost position air extraction (m³/h) : 867
 Number of lights : 4
 Noise level (dB) : 54
 Diameter of air outlet (mm) : 150 / 120
 Grease filter material : Washable stainless steel
 Odour filter : No
 Operating Mode : Convertible
 Delay Shut off modes : 10M
 Optional accessories : Z50XP0X0, Z5102X1, Z5106X5, Z5170X1, Z5286X0, Z5909N1, Z5912X0, Z5914X0, Z5919N1, Z5921N0, Z5923N0
 Type of lamps used : LED
 Grease filter type : Cassette
 Connection Rating (W) : 166
 Current (A) : 10
 Voltage (V) : 220-240
 Frequency (Hz) : 60; 50
 Plug type : Gardy plug w/ earthing
 Installation typology : Island
 Material body : Stainless steel
 Approval certificates : CE, VDE
 Plug type : Gardy plug w/ earthing
 Dimensions of the product, with chimney (if exists) (in) : / x x
 Dimensions of the packed product (in) : 33.07 x 24.01 x 40.94
 Net weight (lbs) : 70
 Gross weight (lbs) : 89
 Motor location : Integrated motor in hood chimney
 No-return airflow flap : Yes
 Length electrical supply cord (cm) : 130
 Dimensions of the product, with chimney (if exists) (mm) : 744-1044 x 898 x 600
 Dimensions of the packed product (HxWxD) (mm) : 840 x 610 x 1040
 Net weight (kg) : 31.807
 Gross weight (kg) : 41.0





CMC

ELECTRIC

N 70

196BMP5N0

196BMP5N0 STAINLESS STEEL

ISLAND CHIMNEY HOOD

BOX DESIGN

IBMP965N

Features

- Energy Efficiency Class: A+ (at a range of energy efficiency classes from A++ to E)
- Average Energy Consumption: 31.6 kWh/year
- Blower Efficiency Class: A*
- Lighting Efficiency Class: A
- Grease Filtering Efficiency Class: B
- Noise min./max. Normal Level: 44/54 dB

Variant:

Design:

Operating and power:

Operating mode / operation

Power:

Environment and safety:

Comfort:

Measures:

Technical information:

- Island chimney hood
- 90 cm wide
- Appliance colour: stainless steel
- Suitable for ducted or re-circulated extraction
- For recirculated extraction recirculating kit or CleanAir recirculating kit (accessory) needed
- Ceiling mounted hood
- TouchControl for extractor speeds and light
- Electronic controls
- TouchControl with 2x7-segment display
- 3 speeds plus 2 intensive via TouchControl
- Electronic controls via TouchControl with 2x7-segment display
- TouchControl (3 speeds plus 2 intensive) with 2x7-segment display
- 3 speeds plus 2 intensive
- Automatic revert setting, 6 minutes
- Automatic 10 minutes after running
- easy to clean Innerframe
- Light dimmer function
- Softlight
- Interval operation
- Noise reduction function
- Efficient BLDC-technology
- 4 x 1,5W LED
- Light Intensity: 425 lux
- Colour Temperature: 3500 K
- Saturation indicator for metal and charcoal filter
- Stainless steel filter covers, dishwasher safe
- Metal grease filter, dishwasher safe
- Extraction rate according to EN 61591 \varnothing 15 cm:
max. Normal use 445 m³/h
Intensive 867 m³/h
- Extraction rate exhaust air according to EN 61591 max. 445 m³/h
- Maximum extraction rate exhaust air 445 m³/h according to EN 61591
- Extraction rate exhaust air according to EN 61591:
max. normal use 445 m³/h, intensive 867 m³/h
- Dimensions recirculating with CleanAir module (HxWxD):
812-1044 x 898 x 600 mm
- Additional noise insulation
- Noise level according to EN 60704-3 und EN 60704-2-13 at max. normal use exhaust air: 54 dB(A) re 1 pW (41 dB(A) re 20 μ Pa sound pressure)
- Noise level according to EN 60704-3 und EN 60704-2-13 exhaust air:
Max. normal use: 54 dB(A) re 1 pW sound pressure: 41 dB(A)
Intensive: 69 dB(A) re 1 pW (56 dB(A) re 20 μ Pa sound pressure)
- Diameter pipe \varnothing 150 mm (\varnothing 120 mm enclosed)
- with one-way flap
- Max. extraction rate: 867 m³/h



N 70

I96BMP5N0

I96BMP5N0 STAINLESS STEEL

ISLAND CHIMNEY HOOD

BOX DESIGN

IBMP965N

Features

** In accordance with the EU-Regulation No 65/2014*

CMC
ELECTRIC





CMC ELECTRIC

N 70

196BMP5N0

196BMP5N0 STAINLESS STEEL

ISLAND CHIMNEY HOOD

BOX DESIGN

196BMP5N0

Dimensioned drawings

