




iQ700
LC91BUV50
LC91BUV50 stainless steel
Chimney hood
Box design

A+

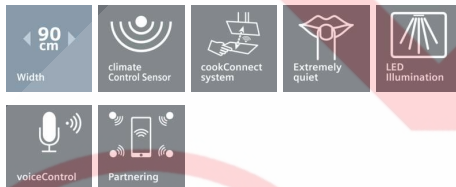

Optional accessories

LZ57300	cleanAir Recirculation Kit
LZ56200	CleanAir active carbon filter spare part
LZ53451	Active carbon filter
LZ53450	Recirculating kit
LZ50961	Backboard 90 x 72 cm
LZ50960	Backboard 90x65cm
LZ12365	Chimney extension 1500 mm
LZ12265	Chimney extension 1000 mm
LZ10FXJ05	Integrated CleanAir Recirculation Kit
LZ10FXI05	Integrated CleanAir Recirculation Kit
LZ00XXP00	CleanAir act.carbon filter regenerative

The wall hood convinces with a **very high** extraction rate in a distinguished design that **perfectly matches** your kitchen.

- ✓ Impressive extraction rate (964 m³/h) for efficient odour and steam removal.
- ✓ The power level and the light of your hood can be adjusted by your cooktop with the cookConnect system or via the Home Connect App.
- ✓ The hood adapts the power level automatically thanks to the climateControl sensor matching the amount of steam and odours.
- ✓ LED light: Optimal visibility and atmosphere when cooking.
- ✓ Extremely quiet when being used (64 db(A)).

Features

Technical Data

Color chimney : Stainless steel
 Typology : Chimney
 Approval certificates : CE, VDE
 Length electrical supply cord (cm) : 130
 Height of product, without chimney (mm) : 46
 Net weight (kg) : 19.813
 Type of control : Electronic
 Number of speed settings : 3-stage + 2 intensive
 Maximum output air extraction (m³/h) : 602
 Boost position output recirculating (m³/h) : 428
 Maximum output recirculating air (m³/h) : 362
 Boost position air extraction (m³/h) : 964
 Number of lights : 3
 Noise level (dB) : 64
 Diameter of air outlet (mm) : 150 / 120
 Grease filter material : Washable stainless steel
 Odour filter : No
 Operating Mode : Convertible
 Delay Shut off modes : 10M
 Optional accessories : LZ00XXP00, LZ10FXI05, LZ10FXJ05, LZ12265, LZ12365, LZ50960, LZ50961, LZ53450, LZ53451, LZ56200, LZ57300
 Type of lamps used : LED
 Grease filter type : Cassette
 Connection Rating (W) : 265
 Current (A) : 10
 Voltage (V) : 220-240
 Frequency (Hz) : 50; 60
 Plug type : Gardy plug w/ earthing
 Installation typology : Wall-mounted
 Material body : Stainless steel
 Approval certificates : CE, VDE
 Plug type : Gardy plug w/ earthing
 Dimensions of the product, with chimney (if exists) (in) : / x x
 Dimensions of the packed product (in) : 22.83 x 25.59 x 38.18
 Net weight (lbs) : 44
 Gross weight (lbs) : 56
 Motor location : Integrated motor in hood chimney
 No-return airflow flap : Yes
 Length electrical supply cord (cm) : 130
 Dimensions of the product, with chimney (if exists) (mm) : 628-954 x 898 x 500
 Dimensions of the packed product (HxWxD) (mm) : 580 x 650 x 970
 Net weight (kg) : 19.813
 Gross weight (kg) : 26.0





iQ700

LC91BUV50

LC91BUV50 stainless steel

Chimney hood

Box design

Features

Design:

- Wall mounted hood
- 90 cm wide
- Appliance colour: stainless steel
- touchControl with 7-segment display

Operating mode / operation

- 3 speeds plus 2 intensive
- Extraction rate according to EN 61591 \varnothing 15 cm:
 - max. Normal use 601 m³/h
 - Intensive 964 m³/h
- Extraction rate in recirculation mode:
 - Max. normal use: 362 m³/h
 - Intensive: 428 m³/h
- Noise level according to EN 60704-3 und EN 60704-2-13 exhaust air:
 - Max. normal use: 64 dB(A) re 1 pW sound pressure: 51 dB(A)
 - Intensive: 73 dB(A) re 1 pW (60 dB(A) re 20 μ Pa sound pressure)
- Noise levels in recirculation mode:
 - Max. normal use: 73 dB(A) re 1 pW (60 dB(A) re 20 μ Pa sound pressure)
 - Intensive: 76 dB(A) re 1 pW (63 dB(A) re 20 μ Pa sound pressure)
- Cooktop-based hood control
- (with matching cooktop)

Comfort:

- Automatic revert setting, 6 minutes
- Automatic 10 minutes after running
- Boost function
- easy to clean Innerframe
- Air quality sensor
- Light dimmer function
- softLight
- interval function: available via Home Connect
- silence function: available via Home Connect
- Efficient BLDC-technology
- 3 x 1,5W LED
- Light Intensity: 373 lux
- Colour Temperature: 3500 K
- Saturation indicator for metal and charcoal filter
- Stainless steel filter covers, dishwasher safe
- Metal grease filter, dishwasher safe
- Additional noise insulation
- with one-way flap
- Energy Efficiency Class: A+ (at a range of energy efficiency classes from A++ to E)
- Average Energy Consumption: 33.9 kWh/year
- Blower Efficiency Class: A*
- Lighting Efficiency Class: A
- Grease Filtering Efficiency Class: B

Technical information:

- Suitable for ducted or re-circulated extraction
- wall fixing system
- Dimensions recirculating with CleanAir module (HxWxD):
 - 689 x 898 x 500 mm - mounting with outer chimney
 - 809-1139 x 898 x 500 mm - mounting with telescopic chimney

- For recirculated extraction recirculating kit or CleanAir recirculating kit (accessory) needed
- Dimensions exhaust air (HxWxD): 628-954 x 898 x 500 mm
- Dimensions recirculating (HxWxD): 628-1064 x 898 x 500 mm
- Diameter pipe \varnothing 150 mm (\varnothing 120 mm enclosed)
- Power rating: 265 W
- Electrical cable length 1.3 m
- Voltage: 220 - 240 V

Home Connect for connected home appliances and operation via smartphone or tablet (only in countries where Home Connect service is available)

- The Home Connect functionality can be extended by integrating numerous applications from external cooperation partners (partnerships)
- Voice Control enabled via popular voice assistants (only in countries where this service is available)

* In accordance with the EU-Regulation No 65/2014



iQ700
LC91BUV50
LC91BUV50 stainless steel
Chimney hood
Box design

Dimensioned drawings

